



Assembly Instructions:


How to assemble your 3-Rod Holder - Inshore Trolling Edition

Step 1

Push a 1/4" x 1/2" screw through one of the two counter-sunk holes at one end of the track and then twist the screw into the threaded inset at the top of the housing.

Tighten the screw with a screwdriver, making sure to keep the adjacent hole in the track aligned with one of the slots on top of the housing.


Repeat with the other side of the track.

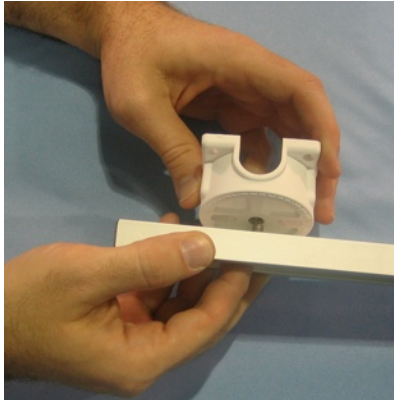

Step 2


Push a 1/4" x 3/4" screw through the adjacent hole in the track and through the slot in the top of the housing. Twist the nut onto the end of the screw. Tighten the nut down using a screwdriver and wrench.

Repeat with the other side of the track.

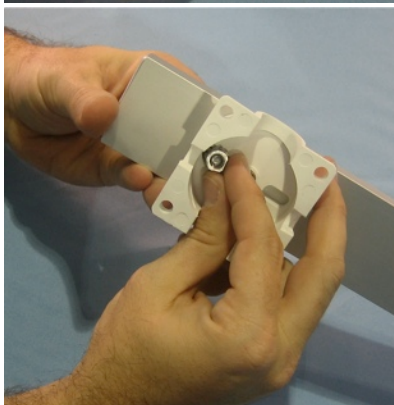

Step 3


Snap the housings back onto the pump and vacuum cup assemblies, making sure that the pumps do not come apart from the vacuum cups. Adjust the housings so that they are firmly seated against the vacuum cups and so that the corner holes in the housings align with the screw holes in the vacuum cups.

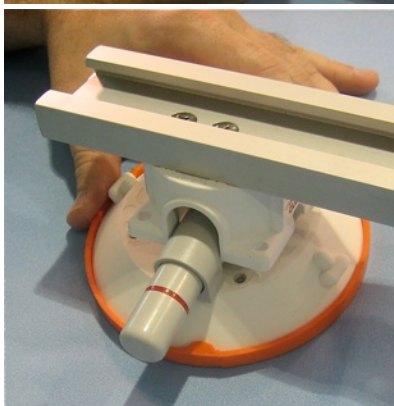

Step 4

Insert and tighten two 5/8" x 10/32 screws into the holes next to the top of the pump. On the opposite side, place the buttress over the two remaining holes and insert and tighten the 3/4" x 10/32 screws.

Slide the rod holders onto the track by squeezing the long tab and pushing the rod holder onto the track.

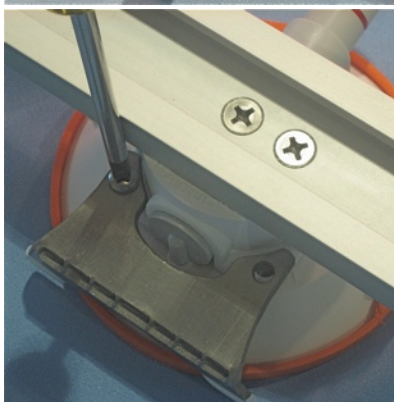

Things you'll need:

Tools

Phillips screwdriver
adjustable wrench or pliers

Parts and Hardware

(2) SeaSucker
(2) Stainless Steel Buttress
(1) aluminum track
(4) 5/8" x 10/32 screw
(4) 3/4" x 10/32 screw
(2) 1/2" x 1/4" x screw
(2) 3/4" x 1/4" screw
(2) 1/4" nut

You can find these
Assembly Instructions
and other useful
information (not to
mention our catalog of
amazing SeaSucker
products) on-line at
www.SeaSucker.com.

